
ELITE KIT RACK ASSEMBLY INSTRUCTION

750ml TASTING DISPLAY

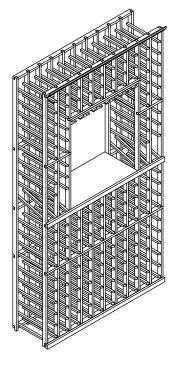

Thank you for purchasing Elite Kit Rack by Genuwine Cellars. The following instructions will help you assemble the 750ml TASTING DISPLAY.

Please study the instructions carefully prior to starting the assembly.

HARDWARE

The following hardware is included in all kits: (QUANTITY WILL VARY, DEPENDING ON KIT.)



Drywall Anchors (QTY: 6)



#8 Robertson Screws (Square Head) (QTY: 6)



Angled Brackets (QTY: 6)



(QTY: 6)

·

TOOLS REQUIRED


The following tools are required (NOT INCLUDED):

IMPORTANT!

Always follow the manufacturer's instructions on how to use the nail gun, to prevent injury. Genuwine Cellars is not liable for any injury incurred while assembling the kit.




Robertson Screwdrivers #6 & #8 (Square Head)



We Recommend A 21 Gauge Nail Gun (Use 21 gauge brand nails, with appropiate air compressor or electric nailer set to 80psi, to prevent spliting)

COMPONENTS The following components are included in the 750ml TASTING DISPLAY. 5a - Front Spacer Bars 689 (QTY: 1) 11 - Crown Mould 4a - Front Spacer Bars 1137 (QTY: 4) (QTY: 1) 2c - Middle Ladder 325 9 - Counter Top (QTY: 5) (QTY: 1) 5b - Back Spacer Bars 689 10 - Base Mould 1137 (QTY: 1) (QTY: 1) 4b - Back Spacer Bars 1137 7 - Stemware Display (QTY: 1) 6b - Back Spacer Bars 241 2a - Middle 2b - Middle 2e - Middle 3 - Right Ladder 2130 1 - Left 2d - Middle (QTY: 2) Ladder 2130 Ladder 2130 Ladder 2130 Ladder 1034 Ladder 2130 6a - Front Spacer Bars 241 8 - Tilt Stop 1137 (QTY: 1) (QTY: 2) (QTY: 1) (QTY: 1) (QTY: 5) (QTY: 1)


Starting from the back of the racks. Place the front of ladders on flat, soft surface, so not to damage front of racks. Space the ladders accordingly. (Note: Ensure proper placement of ladders, and bottoms are all in same direction as shown.)

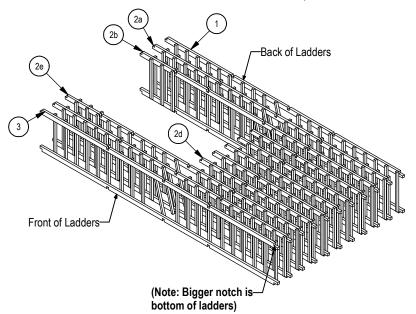


From the bottom and working your way up, place the back spacer bars (4b)(6b) according to the ladder notches. Make sure to carefully interlock the spacer bars to the ladders.

STEP


STEP

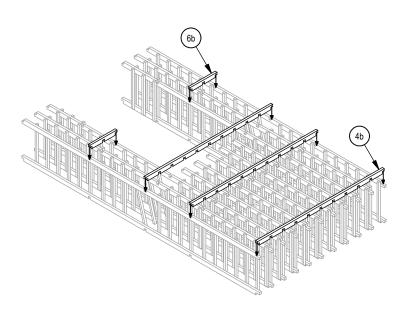



STEP Once spacer bars are properly placed. Start from the bottom of the rack, firmly apply pressure to lock in the joint. Then apply two

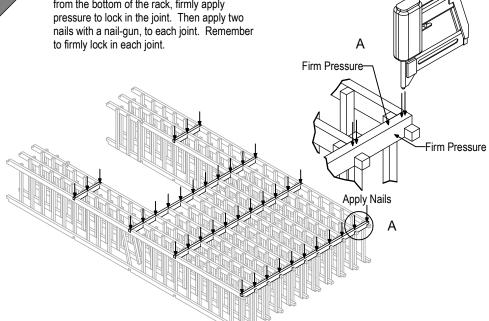

Place the middle ladders (2c) facing down on flat, soft surface, so not to damage front of racks. Space the ladders accordingly and put the back spacer bar (5b) into place. Make sure to center the spacer bar to the ladders. Spacer bar should extend past ladders at each end.




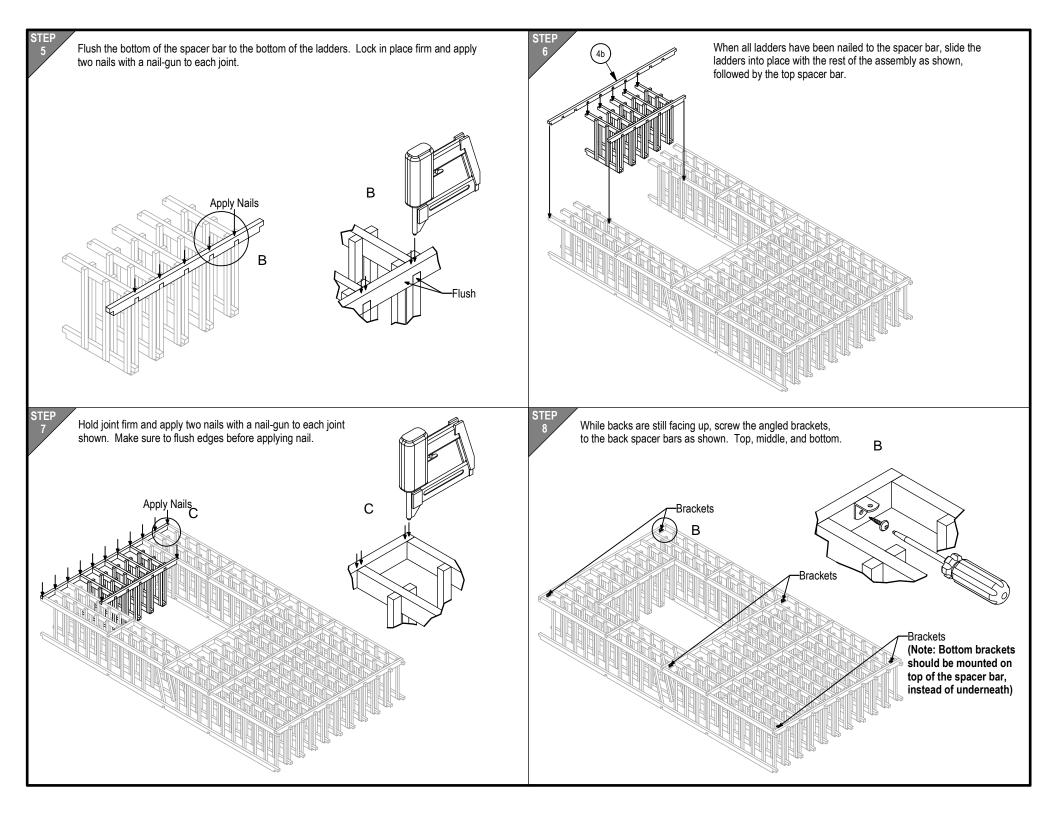


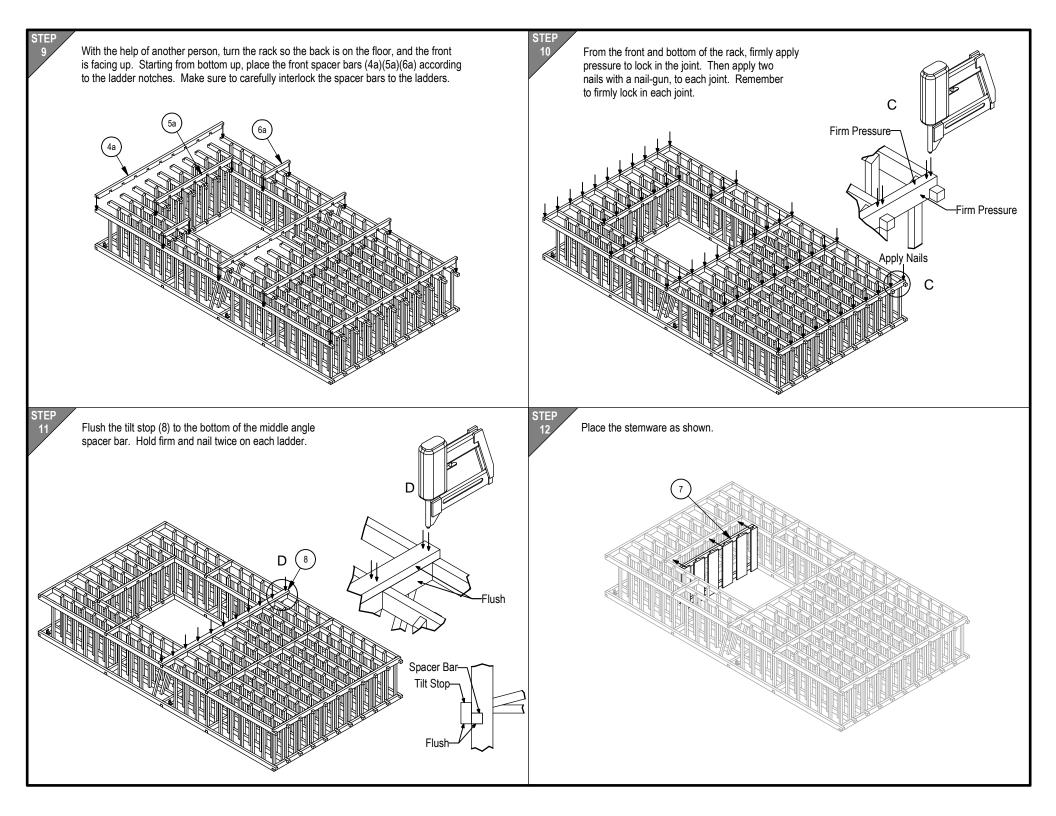

STE


Flush the stemware to the front of the front spacer bar. With the help of another person, hold in place the stemware and nail from the bottom into the spacer bars. Far left side, far right side, and middle.






STEP


Stand the rack upright. Place the counter top (9) above the lower racks.

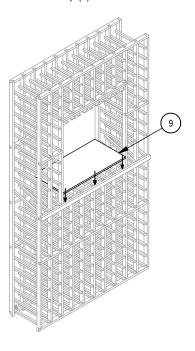

STEP

Applying the counter top, possition edge of counter against tilt stop. Press down on counter, and nail spacer bar to counter from bottom side.





STEP

Optional, finish the display rack by appling the base and crown mould.

